
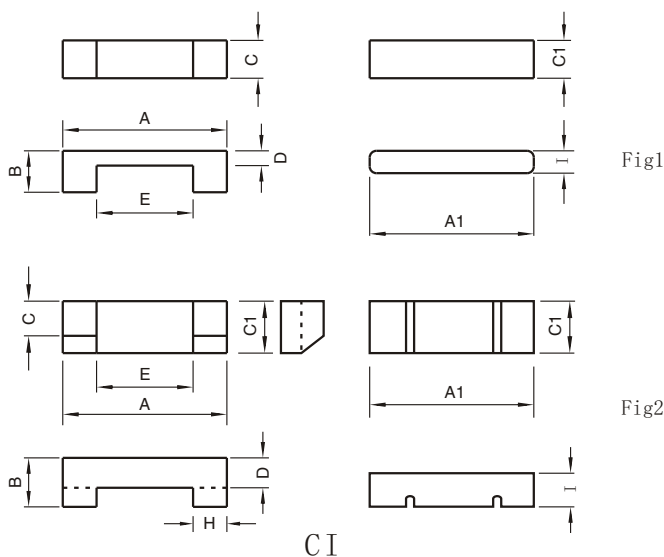


CI TYPE CORES

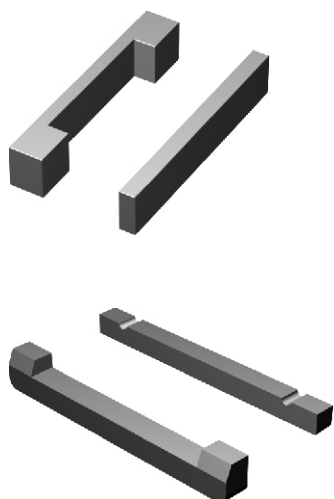

CI TYPE CORES (MATERIALS): P1, P2, P3
Dimensions

CORES TYPE	Dimensions (mm)									
	A	B	C	D	E	H	A1	C1	I	Fig
CI 8	26.00±0.25	2.20±0.08	5.50±0.15	0.90±0.08	23.60±0.25		26.00±0.25	5.50±0.15	1.05±0.05	1
CI 8.0A	26.00±0.3	2.30±0.05	5.50±0.15	1.22±0.05	23.30min	1.25±0.05	26.00±0.3	5.50±0.15	1.05±0.05	1
CI 8.3	28.80±0.3	3.60±0.08	2.70±0.15	2.05±0.10	21.60min	3.40±0.10	29.50±0.5	3.15±0.15	1.75±0.05	2
CI 8.5	28.80±0.3	3.60±0.08	3.20±0.10	2.35±0.10	21.60min	3.40±0.10	29.50±0.5	3.50±0.10	2.20±0.05	2
CI 10	23.10±0.3	2.30±0.08	7.40±0.15	1.10±0.08	20.30±0.2		23.10±0.3	7.40±0.15	1.20±0.05	1
CI 17	22.90±0.3	3.70±0.10	13.25±0.2	2.00±0.15	18.90±0.2		22.90±0.3	13.25±0.2	2.00±0.05	1
CI 25	24.64±0.3	3.45±0.15	5.84±0.10	1.60±0.05	21.46±0.2		25.15±0.3	5.84±0.10	1.80±0.05	1

Effective parameter

CORES TYPE	Effective parameter					
	CI (mm ⁻¹)	Le	Ae	Ve	Wt (g/set)	AL±25% μ H/N ²
CI 8	9.56	52.51	5.49	216.84	1.37	265 (P3)
CI 8.0A	9.10	53.10	5.80	310.00	1.49	280 (P3)
CI 8.3	9.71	55.27	5.69	314.49	1.61	300 (P3)
CI 8.5	7.15	55.44	7.75	429.66	2.05	400 (P3)
CI 10	6.5	48.50	7.52	585.26	1.95	380 (P3)
CI 17	1.79	48.19	26.90	6.20	1669.47	1392 (P3)
CI 25	5.30	52.25	9.86	515.18	2.56	470 (P3)