
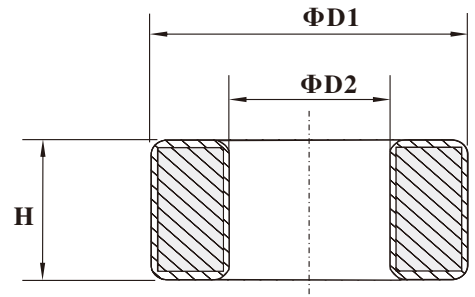


**P3**      **T9\*5\*3**      **C/P**  
**Material**    **Core Size**    **Coating**  
 材质            品名            涂装

C=Epoxy. P=Parylene.

**Dimensions: (UNIT:mm)**


Dimensions(mm)			Wt(g/set)
Epoxy Coating Dimensions(mm)			
ΦD1	ΦD2	H	0.6
9.00±0.30	5.00±0.30	3.00±0.20	
10.00 max	4.20 min	3.90 max	



**Ferrite core**

**Test Conditions**

AL: F=10.0KHz U=0.3V N=10Ts

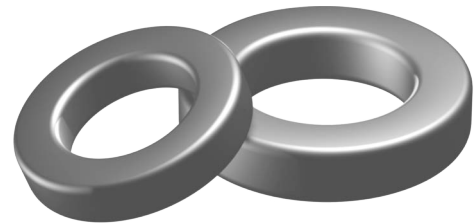

**Effective parameter**

	Ve(mm3)	Ae(mm2)	Le(mm)
	1400	25.6	54.7

**Coating**


The core are coated with epoxy, flame retardant in accordance with "UL 94V-0" file number E228348. The colour is green.

**Ring core data**


GRADE	AL(nH)	μi	TYPE NUMBER
P3	1400±25%	≈2300	T22/14/6.5/P3
H5K	2950±25%	≈5000	T22/14/6.5/H5K
H7K	4100±25%	≈7000	T22/14/6.5/H7K
H10K	5900±30%	≈10000	T22/14/6.5/H10K

**Note:**


- 1: Document is the property of FUAN Inc & is not allowed to be duplicated without authorization
- 2: RoHS compliant.




P3



H5K



H7K



H10K