

SMD POWER INDUCTORS

FAMPI1040-1265 SERIES



FEATURES :

Carbonyl powder inductor
 Low loss realized with low DCR
 Very low acoustic noise and very low leakage flux noise
 Frequency up to 3MHz
 High reliability
 Halogen Free & RoHS compliant

OPTIONS :

Laptops and Pcs
 Switch and servers
 Base stations
 DC/DC converters
 Battery powered devices
 SSD modules

GENERAL SPECIFICATIONS:

Test Frequency(Voltage):100KHz/1.0V
 Parameters Test Temp:25°C
 Operation Temp:-40°C to +125°C
 (Including temperature Rise)
 Storage Temp:0 - 40°C
 Storage Humidity:<70% RH
 Resistance to Soldering Heat:260°C for 10 sec
 Rated Current:Ind. drops of 25% typ at Isat
 Temperature Rise:40°C typ at Irms


ELECTRICAL CHARACTERISTICS:

Stamp	Inductance [uH]	FAMPI1040			FAMPI1260			FAMPI1265		
		DCR [mohm] Max	Isat [A]	Irms [A]	DCR [mohm] Max	Isat [A]	Irms [A]	DCR [mohm] Max	Isat [A]	Irms [A]
R15	0.15	0.65	100	52.0				0.60	118	55.0
R22	0.22	0.95	90.0	40.0				0.60	112	53.0
R30	0.30							0.72	72.0	48.0
R33	0.33							0.80	68.0	46.0
R36	0.36	1.25	70.0	30.0				0.90	66.0	45.0
R40	0.40							1.00	64.0	44.0
R47	0.47							1.20	63.0	41.0
R50	0.50							1.25	60.0	40.0
R56	0.56	1.80	45.0	25.0				1.35	58.0	37.0
R68	0.68	2.10	43.0	22.0				1.50	55.0	35.0
R82	0.82							1.90	50.0	33.0
1R0	1.00	3.20	41.0	20.0	2.40	45.0	29.0	2.30	48.0	30.0
1R2	1.20				2.80	44.0	28.0			
1R5	1.50	4.20	38.0	16.0	3.20	43.0	26.0	3.00	45.0	27.0
2R2	2.20	7.00	27.0	12.5	4.70	34.0	21.0	4.20	37.0	22.0
3R3	3.30	11.8	25.5	10.7	7.10	28.0	17.0	6.80	30.0	18.0
4R7	4.70	18.6	19.0	9.60	11.5	25.0	16.0	8.40	28.0	13.5
5R6	5.60	19.3	18.0	9.00	12.6	22.0	15.5	10.0	23.0	12.5
6R8	6.80				13.8	19.0	15.0	11.5	18.0	11.5
8R2	8.20				16.0	17.0	11.0	15.5	16.0	10.5
100	10.0				20.7	15.5	11.0			
120	12.0				23.0	13.5	9.50			
130	13.0							24.0	13.0	9.00
150	15.0				29.0	13.0	9.00	28.0	12.5	9.00
180	18.0				35.0	12.0	8.50			
220	22.0				39.5	11.0	8.00	37.0	12.0	9.00
270	27.0				56.0	9.00	7.00			
330	33.0				75.0	8.00	6.00			
470	47.0				90.0	7.00	5.50	90.0	9.50	6.50
560	56.0				118	6.50	5.330			
680	68.0				140	6.00	5.00			
820	82.0				161	5.50	4.50			
101	100				200	5.00	4.00			
121	120				235	4.50	3.50			
151	150				350	4.00	3.00			
221	220				550	3.00	2.00			


Note:When ordering,please specify tolerance code.Tolerance:K=±10%,M=±20%,N=±30%

Beyond the above specification also can meet the special requirements.Need detailed content Please to the website query or contact us

SHAPE AND DIMENSIONS

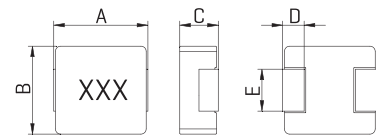

ELECTRICAL SCHEMATIC & PAD LAYOUT



DIMENSIONS:MM

TYPE	A	B	C	D
	±0.35	±0.30	±0.20	REF
FAMPI1040	11.5±0.5	10.0	3.80	2.00
FAMPI1260	13.5±0.5	12.6	5.70±0.3	2.00
FAMPI1265	13.5±0.5	12.6	6.20±0.3	2.00

TYPE	E	H	I	J
	REF	REF	REF	REF
FAMPI1040	3.00	4.10	4.10	5.40
FAMPI1260	3.50	5.00	3.25	8.00
FAMPI1265	3.50	5.00	3.25	8.00