

# HIGH CURRENT SURFACE-MOUNT POWER SHIELDED INDUCTORS FASDRS0603,0704,1005,1205 SERIES



## FEATURES :

Current up to 2.6A  
Very Small Foot Print  
Flat-top for Pick & Place  
Shielded structure

## OPTIONS:

Tape & Reel is Standard  
Bulk packaging Available  
for Smaller Quantities  
Tolerance: K=10%,M=20% is  
Standard,Tighter Tolerances Available

## COMMON APPLICATIONS:

Power supply for VTRs  
OA equipment  
LCD televisions  
Notebook PCs  
Portable communication equipment  
DC/DC converters,etc


## STANDARD SPECIFICATION:

Part Number	L[μH]	DCR[ohm]Max.				IDC[A]			
		FASDRS 0603	FASDRS 0704	FASDRS 1005	FASDRS 1205	FASDRS 0603	FASDRS 0704	FASDRS 1005	FASDRS 1205
100M	10	0.14	0.07	0.06	0.05	1.00	1.65	2.06	2.65
120M	12	0.16	0.07	0.07	0.05	0.94	1.57	1.94	2.50
150M	15	0.18	0.08	0.07	0.06	0.86	1.39	1.72	2.45
180M	18	0.25	0.10	0.08	0.06	0.78	1.9	1.58	2.40
220M	22	0.32	0.13	0.08	0.07	0.76	1.12	1.42	2.20
270M	27	0.36	0.16	0.10	0.08	0.64	1.06	1.32	2.00
330M	33	0.41	0.18	0.11	0.10	0.61	0.97	1.16	1.80
390M	39	0.47	0.18	0.12	0.11	0.53	0.91	1.10	1.65
470M	47	0.51	0.27	0.14	0.12	0.50	0.80	1.00	1.50
560M	56	0.72	0.29	0.19	0.15	0.46	0.76	0.93	1.38
680M	68	0.82	0.33	0.21	0.17	0.42	0.68	0.85	1.26
820M	82	0.82	0.43	0.28	0.20	0.42	0.62	0.79	1.14
101M	100	0.82	0.49	0.34	0.25	0.42	0.55	0.72	1.05
121M	120	0.82	0.68	0.37	0.28	0.42	0.49	0.63	0.95
151M	150	0.82	0.94	0.51	0.40	0.42	0.44	0.55	0.85
181M	180	0.82	1.00	0.57	0.48	0.42	0.40	0.50	0.77
221M	220	0.82	1.18	0.78	0.52	0.42	0.36	0.47	0.70
271M	270	0.82	1.30	0.87	0.70	0.42	0.33	0.41	0.63
331M	330	0.82	1.30	1.20	0.80	0.42	0.33	0.37	0.57
391M	390	0.82	1.30	1.34	1.08	0.42	0.33	0.5	0.52
471M	470	0.82	1.30	1.50	1.20	0.42	0.33	0.33	0.48
561M	560	0.82	1.30	1.50	1.34	0.42	0.33	0.33	0.44
681M	680	0.82	1.30	1.50	1.78	0.42	0.33	0.33	0.40
821M	820	0.82	1.30	1.50	2.00	0.42	0.33	0.33	0.36

Note:1. K=±10%,M=±20%,N=±30%

## TECHNICAL INFORMATION:

·Testing: [Equivalent acceptable]  
·Inductance:HP4285A  
·RDC:QuadTech 1880 Milliohmmeter  
·Q- HP4342A-SRF-HP4191A  
·IDC Max:Determined when superimposed  
·DC current is decreased 10% against its initial value  
·Operating temperature: -40°C to +85°C  
·Storage Temperature: -40°C to +105°C  
·Solder methods: Vapor Phase,Infrared Reflow  
·Resistance to soldering heat:260°C for 10 seconds  
·Solvent resistance: Conforms to MIL-STD-202E  
·Marking: Inductance & Tolerance  
·Ordering information:  
·Type:Surface Mounting Type.  
·Style:DR Core with RL core.  
·Anductance:101 for 100uH.  
·Anductance tolerance:M:±20%.  
Note1:All specification subject to change without noticed.

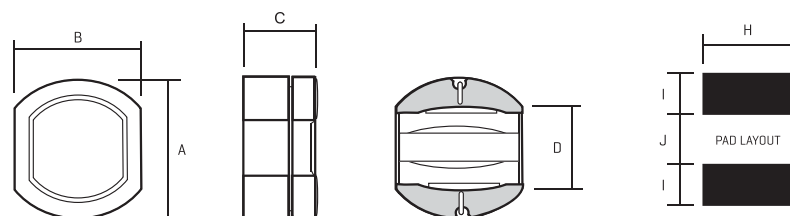

DIMENSIONS IN: mm

Part Number	A	B	C	D	H	I	J
FASDRS-0603	6.2±0.3	5.6±0.3	3.2±0.3	1.7	5.5	2.25	1.7
FASDRS-0704	7.8±0.35	7.0±0.35	4.5±0.4	1.9	7.5	4.0	2.0
FASDRS-1005	10.0±0.4	9.0±0.4	5.0±0.5	2.5	9.5	5.0	2.5
FASDRS-1205	12.6±0.5	11.6±0.5	5.4±0.5	3.0	12.0	6.0	3.0