


HIGH FREQUENCY CURRENT SENSING TRANSFORMER

FACTE6B SERIES



ELECTRICAL SPECIFICATION


- Temperature Rise Current(Irms):The current when temperature of coil increases up to max.ΔT=40°C.(Ta=20°C)
- Operating temperature: -40°C to +125°C
- L: HP4284A PRECISION LCR METER
- DCR: CHENHWA 502 OHM METER
- Electrical specifications at 25°C

FEATURES

- Very low DC resistance
- Different turns ratios
- Small package
- RoHS compatible
- Other pinning on request

APPLICATIONS

- Switching power supplies
- feedback control
- overload sensing
- Load drop/shut down detection

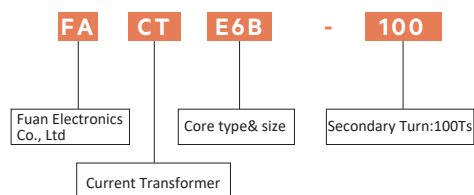


ELECTRICAL CHARACTERISTICS FORM

Part Number	Turns ratio sec:pri	Secondary Inductance @100KHZ0.1V (uH)MIN	DCR(Ω)		Sensed Current(A) (Max)
			Sec Max	Pri Ref	
FACTE6B-100	100:1	800	0.90	0.0007	10

Product datasheet

ELECTRICAL INFORMATION

Dimension in mm

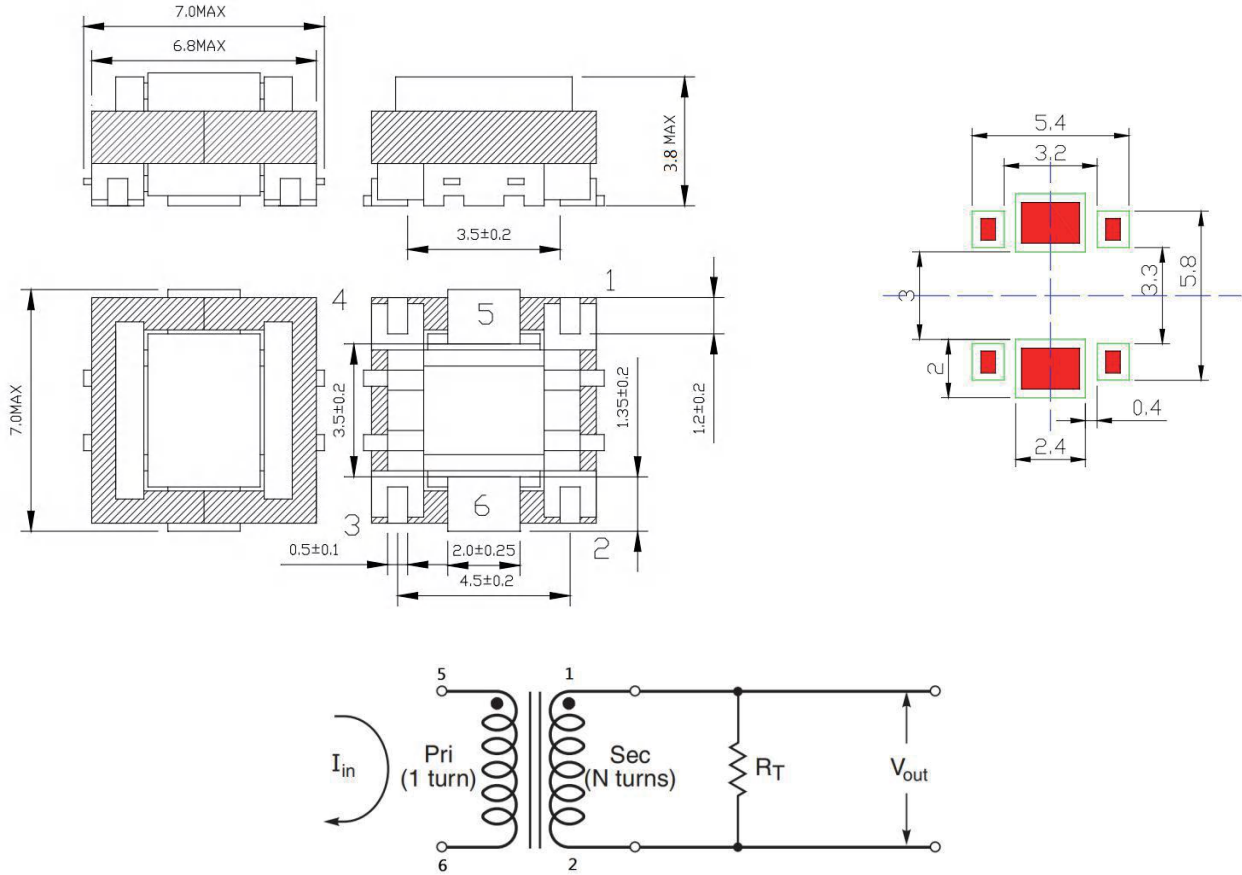

CURRENT VS TEMPERATURE RISE

