

16W EI54/18.8 FAPE5418 SERIES



FEATURES

- Two compartments bobbin
- Self-extinguishing plastics UL94V-0
- Degree of protection IP67
- Weight: 0.42kg
- Temperature class to 40 °C/B

Design complies with the following certifications:

	UL5085-1
	UL5085-3
	CSA-C22.2-66.1-06
	CSA-C22.2-66.3-06




COMMON APPLICATIONS

- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom

OPTIONS


- Bulk packaging is standard
- Custom design available

PHYSICAL CHARACTERISTICS

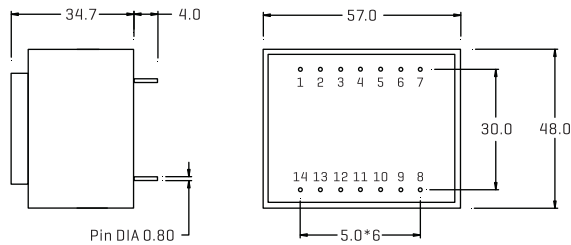

ALL DIMENSIONS IN MM

TECHNICAL INFORMATION

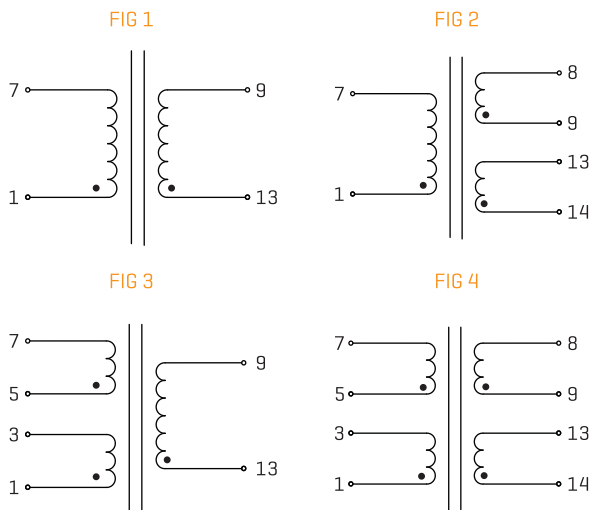

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
FAPE541801	230	6/2666	7.6	1
FAPE541802	230	9/1777	11.3	1
FAPE541803	230	12/1333	15.0	1
FAPE541804	230	15/1066	18.4	1
FAPE541805	230	18/888	22.4	1
FAPE541806	230	24/666	29.6	1
FAPE541807	230	2*6/1333	2*7.6	2
FAPE541808	230	2*9/888	2*11.3	2
FAPE541809	230	2*12/666	2*15.0	2
FAPE541810	230	2*15/533	2*18.4	2
FAPE541811	230	2*18/444	2*22.4	2
FAPE541812	230	2*24/333	2*29.0	2
FAPE541813	115	6/2666	7.6	1
FAPE541814	115	9/1777	11.3	1
FAPE541815	115	12/1333	15.0	1
FAPE541816	115	15/1066	18.4	1
FAPE541817	115	18/888	22.4	1
FAPE541818	115	24/666	29.6	1
FAPE541819	115	2*6/1333	2*7.6	2
FAPE541820	115	2*9/888	2*11.3	2
FAPE541821	115	2*12/666	2*15.0	2
FAPE541822	115	2*15/533	2*18.4	2
FAPE541823	115	2*18/444	2*22.4	2
FAPE541824	115	2*24/333	2*29.0	2
FAPE541825	2*115	6/2666	7.6	3
FAPE541826	2*115	9/1777	11.3	3
FAPE541827	2*115	12/1333	15.0	3
FAPE541828	2*115	15/1066	18.4	3
FAPE541829	2*115	18/888	22.4	3
FAPE541830	2*115	24/666	29.6	3
FAPE541831	2*115	2*6/1333	2*7.6	4
FAPE541832	2*115	2*9/888	2*11.3	4
FAPE541833	2*115	2*12/666	2*15.0	4
FAPE541834	2*115	2*15/533	2*18.4	4
FAPE541835	2*115	2*18/444	2*22.4	4
FAPE541836	2*115	2*24/333	2*29.0	4